

Kaman Huskie Build Notes

Trim all of the parts from the formed sheet make sure you leave a small amount for final trim.




Preliminary Trim

Trim the individual pieces make sure you leave the 1/8" glue lip on one side of the fuselage and one side of the exhaust pipe.



Pieces trimmed ready for assembly


Picture below shows glue lip. Drill the marked body mount holes at this time (3/32).

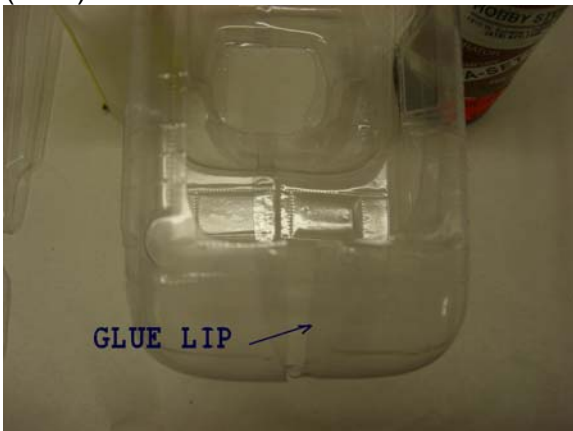

Cut out the openings for the rotor and the bottom of the fuselage. Also cut the small hole for the exhaust tube.




Next use masking tape to assemble the fuse halves and also the exhaust pipe.

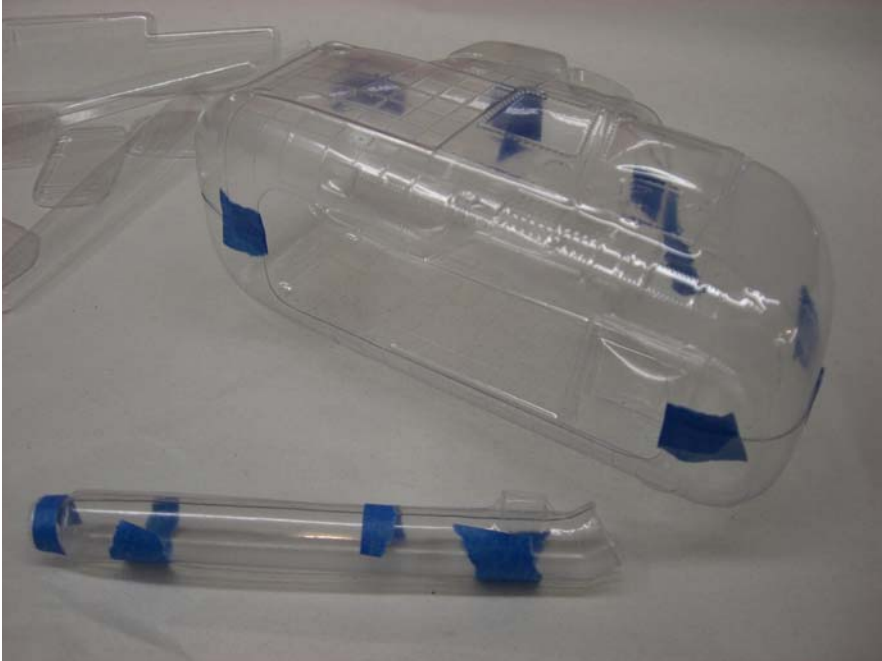

I use CA glue to assemble but epoxy will also work.




Don't do this I had to use a scalpel to remove the exhaust from my thumb. It also leaves a spot that you have to sand down.

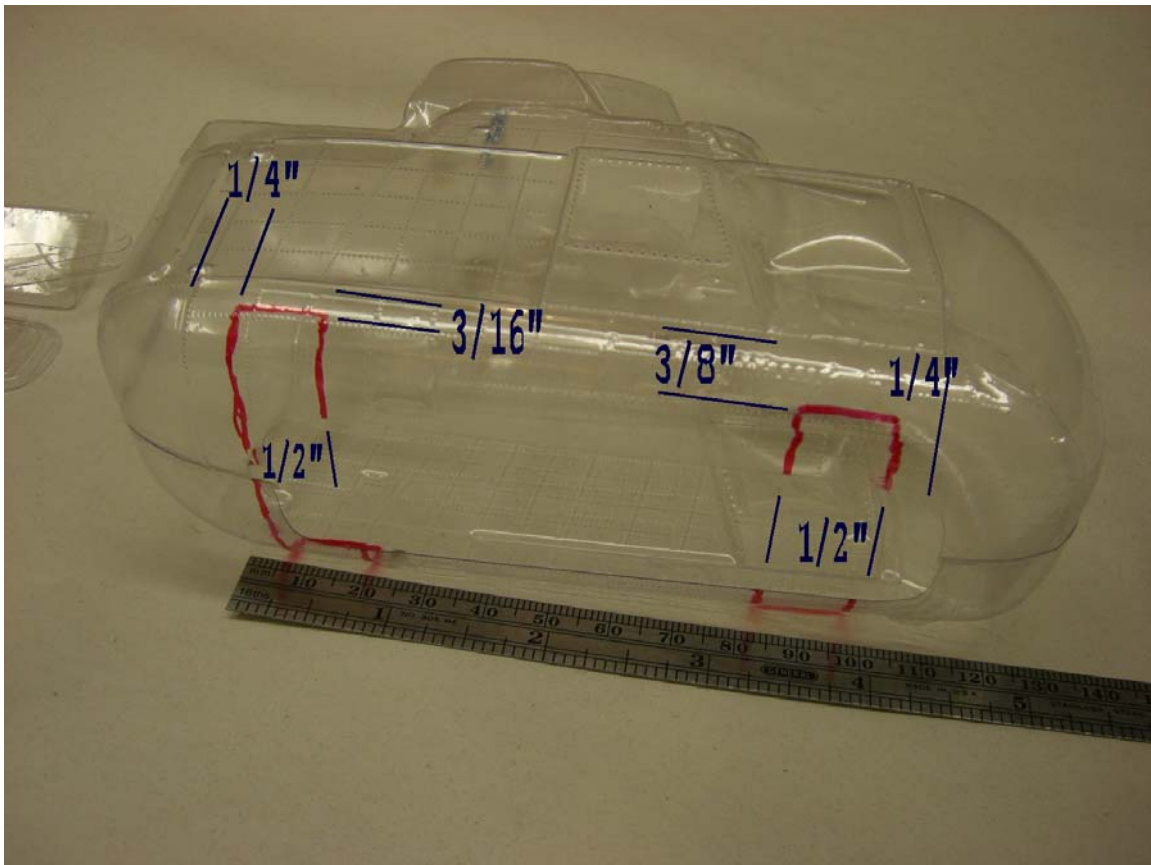


If you are using the optional landing gear these are the cuts that need to be made. If you are using the stock skids you do not need these cuts.

Glue the tail pieces together next. Cut the large vertical fins as shown by the red marks. Cut the horizontal tail also. When gluing the verticals on make sure the large half goes down.

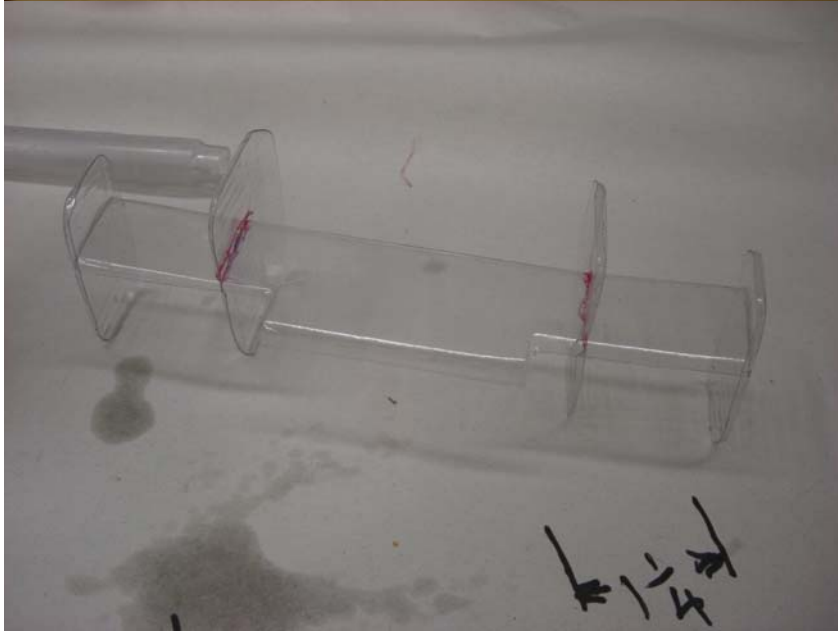

Trim and glue on the tail booms making sure you get them even and level. Then glue on the tail. Once that is positioned you install the exhaust .

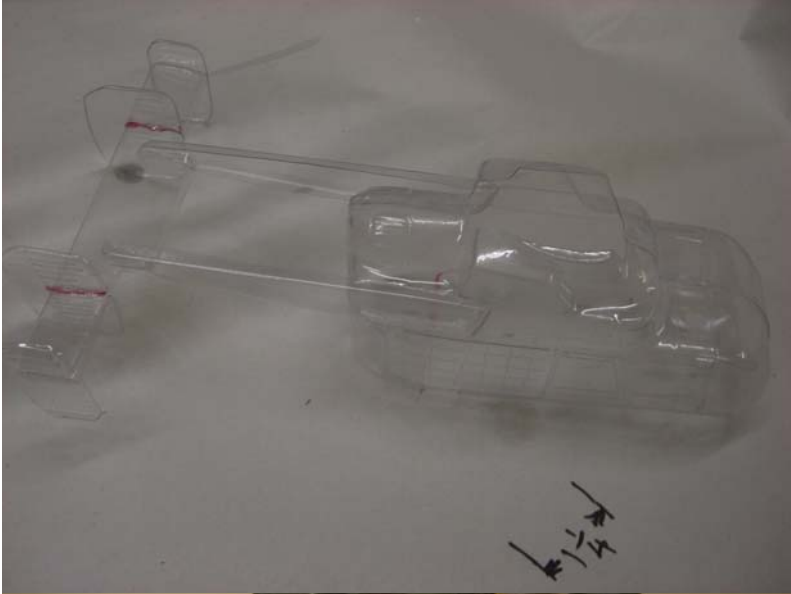

Shown with optional

landing gear.

Wash the fuselage with mild soap and water before masking and painting.

